



BL6 OMNILUX

Descrizione

Faro di ricerca LED, con forma ribassata ed aerodinamica, a brandeggio elettrico. Provvisto di:

- Dispositivo automatico di antiabbagliamento all'accensione e ritorno in posizione allo spegnimento;
- Fonte luminosa composta da 6 LED;
- Movimento verticale 110°;
- Movimento orizzontale 360° no stop;

Versione telecomandata **BL6 Omnilux** provvista di: telecomando di movimentazione.

Versione radiocomandata **BL6 RX Omnilux** provvista di: comando fisso di alimentazione e movimentazione, radiocomando di movimentazione con cavo spiralato e spinotto universale per presa accendisigari per la ricarica del comando.



BL6 RX OMNILUX

Description

Low profile LED electric searching light provided with:

- Automatic anti-dazzle device and identification of the shaft of light in light up phase;
- 6 LEDs;
- Vertical movement 110°;
- Horizontal movement 360° no stop;

Remote controlled version **BL6 Omnilux** provided with movement Remote control.

Radio controlled version **BL6 RX Omnilux** provided with Mobile radio drive with extendible cable, spiral cable with cigar lighter to charge the mobile radio drive.

ANALOGICA ANALOG

Codice Code	Colore Colour	Voltaggio Voltage	LED LEDs	Tipo Type	Montaggio Mounting	Peso Weight	Altezza Height	IP	Versione Version
BL6.12	○	12V	6	LED	⌋⌋⌋	1350gr	107mm	65	TELE
BL6.24	○	24V	6	LED	⌋⌋⌋	1350gr	107mm	65	TELE
BL6.12.RX	○	12V	6	LED	⌋⌋⌋	1350gr	107mm	65	RADIO



CAN-bus CAN-bus

Codice Code	Colore Colour	Voltaggio Voltage	LED LEDs	Tipo Type	Montaggio Mounting	Peso Weight	Altezza Height	IP	Versione Version
BL6.12.CB	○	12V	6	LED	⌋⌋⌋	1350gr	107mm	65	TELE
BL6.12.RX.CB	○	12V	6	LED	⌋⌋⌋	1350gr	107mm	65	RADIO



per allestimento gestito da CBOXAPLCAN
for conversion managed by CBOXAPLCAN



CBOXAPLCAN

CBOXAPLCANFWY


Accessori Accessories



BRN.BRD

GRBL6

Dimensioni Dimensions (mm)

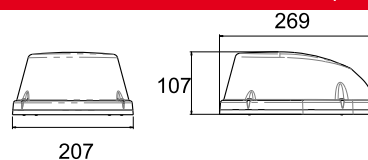

Imballo Packaging



Pz Pcs: 1 / 4

Contattaci Contact us

Ricambi Spare Parts



CFobl2M1

CPBL6

SGBL20

232001070001

CMOBL21

CMOBLCV.RX

CAVO.RX

